


## Minor Parachute Premier Liftbags.



The Minor Parachute Premier liftbags range from 25kg (M25) to 500Kg (M10), with a safe working load of 6:1. Each bag has heavy duty webbing straps, anchor points, shackles, and manual dump valve. All liftbags are supplied ready for use with test certificates and logbook. All Parachute Liftbags are fitted with an inverter line attachment point which is clearly labelled.

### Technical Specifications

Model	Lift Capacity	Overall Height	Overall Dia	Approx. Folded Dimensions m./dia x m./l	Small Dump Valve	Net Weight
M25	25Kg	0.75 M	0.40 M	0.10 x 0.30	Yes	1.7 Kg
M1	50 Kg	0.85 M	0.50 M	0.15 x 0.40	Yes	2.0 Kg
M2	100 Kg	1.13 M	0.60 M	0.15 x 0.45	Yes	2.0 Kg
M5	250 Kg	1.92 M	0.80 M	0.20 x 0.54	Yes	5.0 Kg
M10	500 Kg	2.12 M	1.00 M	0.25 x 0.66	Yes	7.0 Kg

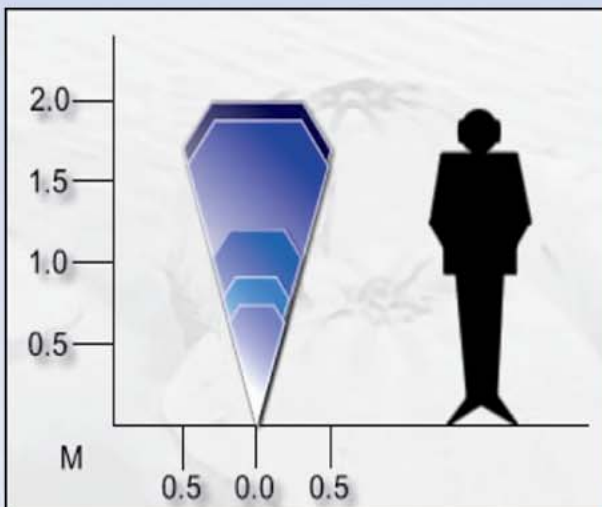

### Advantages

Fitted with an inverter line attachment point which is clearly labelled.  
 Open bottom with single point lift.  
 Fabricated from high tenacity polyester cloth coated with P.V.C.  
 Durable, versatile and easy to use.  
 Folded compactly for easy efficient storage.  
 Radio Frequency (RF) welded seams for strength and integrity.  
 Safe working load ratio of 6:1.  
 Complete with test certifications and logs, these products are ready for use when leaving our manufacturing facility..  
 Suitable for long term use.

### Applications

- Recreational / sports diving.
- Static Buoyancy.
- Small object salvage, eg anchors and treasures.
- Entertainment and media props.



All of JW Automarine's products are manufactured in accordance with **ISO 9001:2008** and exceed **IMCA D016 REV 3:2007** requirements of 5:1 SWL  
**Quality Certifications**  
 ISO 9001:2008 Certificate Number GB09/77978